




Abbruch- und Sortiergreifer




		S75-D	S100-D	S150-D	S200-D	S300-D	S400-D	
Anbauklasse	t	0,7-1,2	1-2	1,5-3	2,5-4	2,5-5	4-6	
Gewicht	kg	75	90	140	240	280	350	
Arbeitsdruck Öffnen/Schließen max.	bar	300	300	300	300	300	300	
Arbeitsdruck Drehen min	bar	170	170	170	170	170	190	
Arbeitsdruck Drehen max.	bar	210	210	210	210	210	210	
Ölbedarf Öffnen/Schließen max.	l/min.	15	20	25	35	35	40	
Ölbedarf Drehen max.	l/min.	5	5	10	10	10	12	
Schalenbreite A	mm	300	350	450	500	500	600	
Breite geöffnet B	mm	600	770	800	1160	1160	1400	
Höhe geöffnet C	mm	595	610	650	710	770	880	
Höhe geschlossen D	mm	600	670	670	810	850	1010	
Breite geschlossen E	mm	430	500	545	785	780	850	
Schaleninhalt	l	30	40	70	100	100	150	
Schließkraft	kn	6	7	15	20	20	23	
Schlauchanschluss Öffnen/Schließen	-	L10	L10	S12	S12	S12	S12	
Schlauchanschluss Drehen	-	L10	L10	L10	L10	L10	L10	

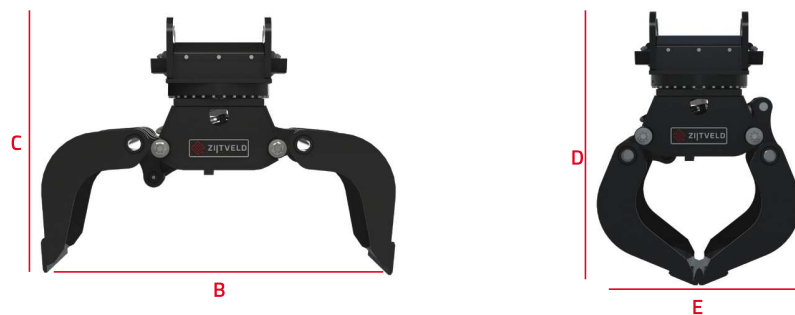


S450-D	S452-D	S502-D	S603-D	S804-D	S904-D	S1004-D	S1104-D
5-8	6-11	7-12	10-16	12-20	13-20	16-20	16-25
400	450	600	840	990	1030	1060	1350
300	320	350	350	350	350	350	350
190	190	190	190	190	190	190	190
210	210	210	210	210	210	210	210
50	70	90	100	120	120	150	150
12	15	15	25	25	25	25	35
700	700	600	800	800	900	1000	900
1500	1550	1700	1750	1950	1950	1950	2100
900	1025	1050	1140	1215	1240	1240	1410
1055	1100	1235	1315	1440	1470	1470	1600
890	885	1055	1070	1180	1180	1175	1300
200	200	300	400	500	600	700	750
24	24	30	35	46	46	46	55
S12	S16	S16	S20	S20	S20	S20	S25
L10	S12	S12	S16	S16	S16	S16	S16

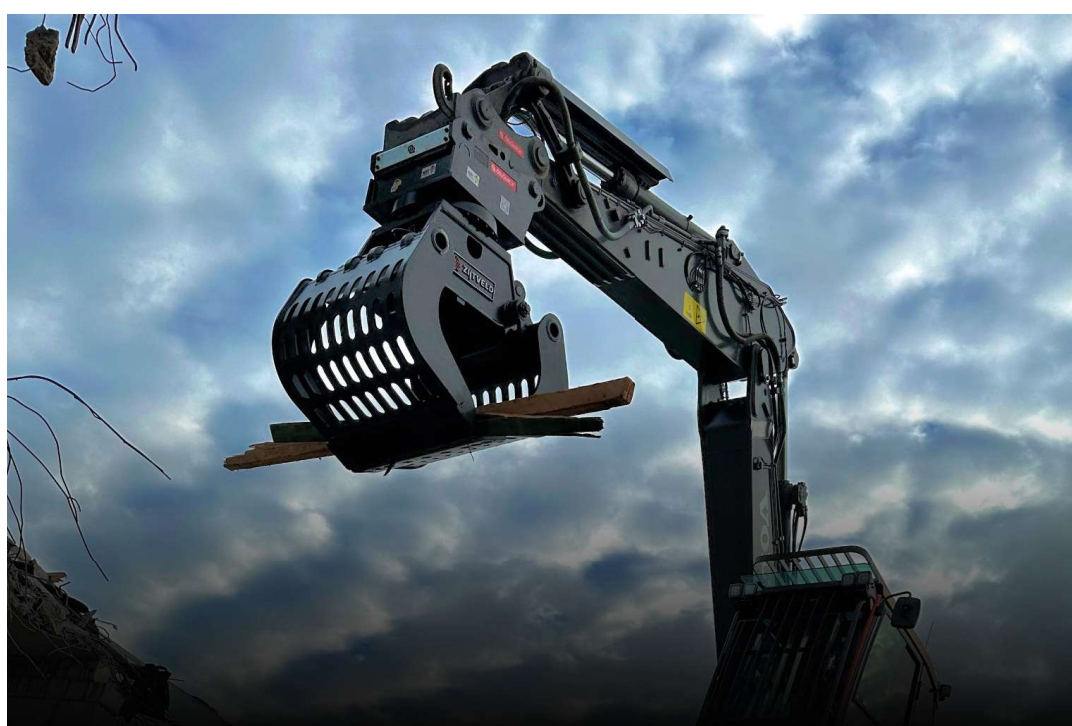

Abbruch- und Sortiergreifer



		S1204-D	S1404-D	S1704-D	S1804-D	S1904-D	S2504-D	
Anbauklasse	ton	17-28	20-28	23-30	24-35	25-38	28-50	
Gewicht	kg	1450	1550	1750	1800	1900	2435	
Arbeitsdruck Öffnen/Schließen max.	bar	350	350	350	350	350	350	
Arbeitsdruck Drehen min	bar	190	190	190	190	190	190	
Arbeitsdruck Drehen max.	bar	210	210	210	210	210	210	
Ölbedarf Öffnen/Schließen max.	l/min.	160	170	170	170	180	200	
Ölbedarf Drehen max.	l/min.	35	35	35	35	35	35	
Schalenbreite A	mm	1000	1200	1200	1200	1200	1200	
Breite geöffnet B	mm	2100	2100	2250	2250	2250	2200	
Höhe geöffnet C	mm	1410	1410	1500	1550	1650	1635	
Höhe geschlossen D	mm	1600	1600	1680	1680	1690	1830	
Breite geschlossen E	mm	1300	1300	1400	1400	1400	1370	
Schaleninhalt	litr	800	850	900	950	900	1000	
Schließkraft	kn	68	68	80	80	80	90	
Schlauchanschluss Öffnen/Schließen	-	S25	S25	S25	S25	S25	S30	
Schlauchanschluss Drehen	-	S16	S16	S16	S16	S16	S16	

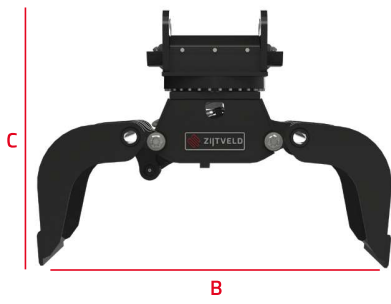

S2704-D	S3004-D	S4000-D	S4500-D	S5003-D	S8000-D	S14000-D	S20000-D
30-50	35-50	40-65	45-80	45-100	70-120	100-200	175-300
2635	2935	4000	4200	5000	7250	13000	18000
350	350	350	350	350	350	350	350
190	190	190	190	190	190	190	190
210	210	250	250	250	250	250	250
200	200	250	250	300	320	350	375
35	35	40	40	60	70	100	125
1360	1500	1500	1500	1500	1800	1800	2040
2200	2400	2850	2850	3000	3800	4450	4850
1635	1635	1800	1800	1825	2210	2570	2765
1830	1935	2050	2090	2150	2525	3100	3200
1370	1475	1755	1755	1890	2400	2830	3190
1100	1300	1500	1500	1600	3600	5000	6700
90	90	110	110	130	150	180	230
S30	S30	SAE	SAE	SAE	SAE	SAE	SAE
S16	S16	S20	S20	S20	S25	S25	S25

